


KEY FEATURES:

- Suitable for concrete, asphalt, natural stone and timber substrate.
- Complies with AS/NZS 4586 standards for Slip Resistance R11/P5.
- Complies with AS/NZS 1428.4.
- Suitable for External and Internal Use.
- High UV Stability.
- 10 Years Warranty.
- Manufactured in Australia.

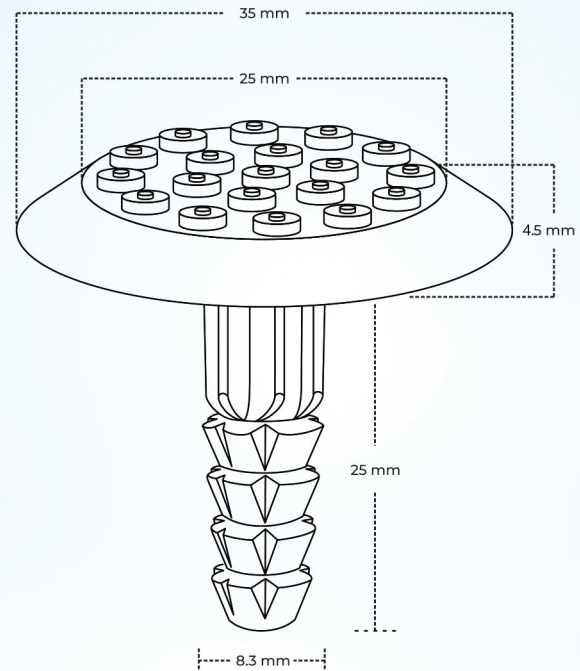


TESTING

Test Method	Standard	Result
CSIRO Slip Wet Pendulum Test	AS/NZS 4586 Appendix A	P5
CSIRO Slip Oil Wet Ramp Test	AS/NZS 4586 Appendix D	R11
Luminance Test	AS/NZS 1428.4 Wet & Dry Luminance	45% Colour Contrast

DIMENSIONS

Top of Dome	25 mm
Base of Dome	35 mm
Height of Dome	4.5 mm
Stem Diameter	8.3 mm
Stem Length	25 mm

COLOURS

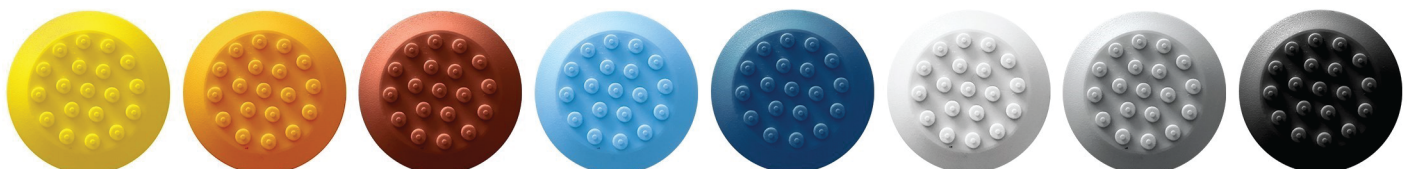

YELLOW

DAFFODIL

TERRACOTTA

SKY BLUE

DARK BLUE

WHITE

GREY

BLACK



1300 184 679



info@raltact.com.au



www.raltact.com.au



18 C/4 Distillery Drive Pyrmont NSW 2009.

